


# COL-GL60R

## Liquid Phase, Bituminous Coal Base Carbon

COL-GL60R (8 x 30) is a hard reactivated Bituminous Coal based activated carbon, which is recommended for point-of-use (POU) water treatment. COL-GL60R (8 x 30) efficiently removes chlorine, taste and odor compounds, and volatile organics, even with brief contact times typical of POU filtration.

### TYPICAL PHYSICAL PROPERTIES / SPECIFICATIONS

Iodine Number, min.	800
Bulk Density	28-30
Abrasion No. min.	75
Effective Size	0.8-1.0 mm
U.S. Standard Sieve Size	8x30
<b>Larger than No. 8 max.</b>	15%
<b>Smaller than No. 30 max.</b>	4%
Moisture as packed, max.	2%

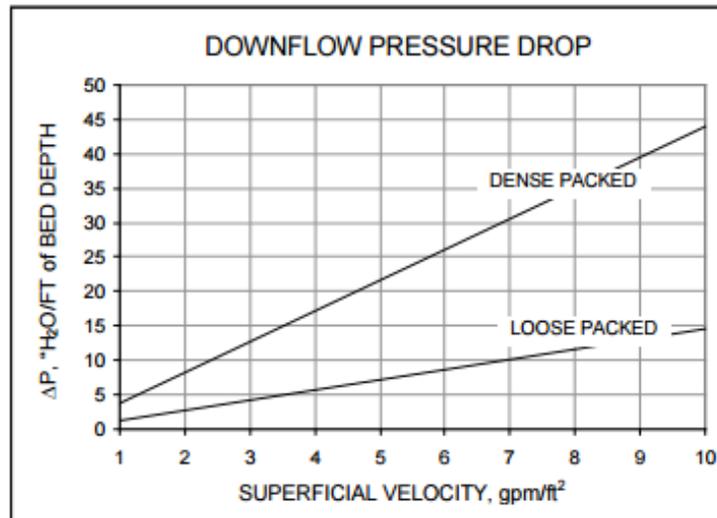

### STANDARD PACKAGING

55lb or 27.5lb Polylined Polypropylene Bags | 200lb Fiber Drums | 1100lb Supersacks

This information is offered solely for your consideration and verification. It has been gathered from reference materials and/or test procedures and is believed to be true and accurate. None of this information shall constitute a warranty or representation, expressed or implied for which we assume legal responsibility or that the information or goods is fit for any particular use either alone or in combination with other goods or processes.